



IM-o46o Ice Cube Machine


Models

- IM-o46o-AC
 IM-o46o-AH
 IM-o46o-WC
 IM-o46o-WH



ICETRO IM-o46o ice machine on a IB-o33 bin

*Ice Machine and Bin sold separately

- Up to 444 lbs production capacity (70F/50F, 24 Hours)
- 304 stainless-steel exterior (durable & rust-resistant)
- ENERGY STAR® qualified  (air-cooled only)
- Simple diagnostic panel to assist service & maintenance
- Cleaning switch for auto cleaning cycle
- Magnetic frame cleanable condenser air filters
- Adjustable flush time to reduce scale & cleaning cost
- ABS antimicrobial interior to reduce slime & cleaning cost
- Water distributor tube & water sump removed w/o tools
- Heavy duty water curtain, pins & hangers for easy removal
- Hinged front doors for easy access
- No screws on side or back panels for easy access
- Sides & top vents for optimal ventilation
- Improved evaporator section to reduce airborne bacteria
- Power cord with NEMA 5-15 plug
- R-404A refrigerant

Ice Shape



Half Cube
 $\frac{3}{8}'' \times 1\frac{1}{8}'' \times \frac{7}{8}''$
 (.95 x 2.86 x 2.22 cm)



Cube
 $\frac{7}{8}'' \times \frac{7}{8}'' \times \frac{7}{8}''$
 (2.22 x 2.22 x 2.22 cm)

Factory Warranty

| | | |
|--------------------------|--------------|--------------|
| Parts & Labor | Parts | Parts |
| 3 YR | 5 YR | 5 YR |
| Ice Maker | Evaporator | Compressor |



Extend ice machine warranty 1 year by installing an IcePro 400 with ice machine.

*Applies only to new ice machines, at the time of original installation & start-up.

Specifications

BTU Per Hour:

6,184

Refrigerant:

R404A

- Ambient Temperature Range: 50 to 100 F (10 to 37 C)
- Water Temperature Range: 50 to 90 F (10 to 32 C)
- Potable Water Pressure: Min. 20 psi (137.9 kPA) Max. 80 psi (551.1 kPA)
- Condenser Water Pressure: Min. 20 psi (1.38 bar) Max. 150 psi (10.34 bar)

Ice Machine Electric

115/60/1

Minimum circuit ampacity:

Air-cooled: 15 *1ph*
 Water-cooled: 15 *1ph*

Maximum fuse size:

Air-cooled: 25 *1ph*
 Water-cooled: 25 *1ph*

Accessories

Bin-Stat Kit IBO-150KIT

Recommended when ice machine is installed on soda dispenser.



Water Filtration IcePro 400


Reduces sediment and chlorine contaminants with the use of Citrine.






IM-0460 Ice Cube Machine

IM-0460 Air Cooled

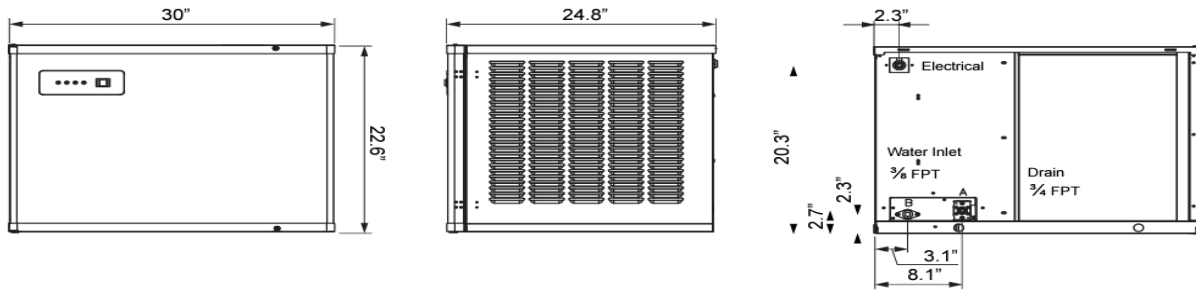

IM-0460 Water Cooled

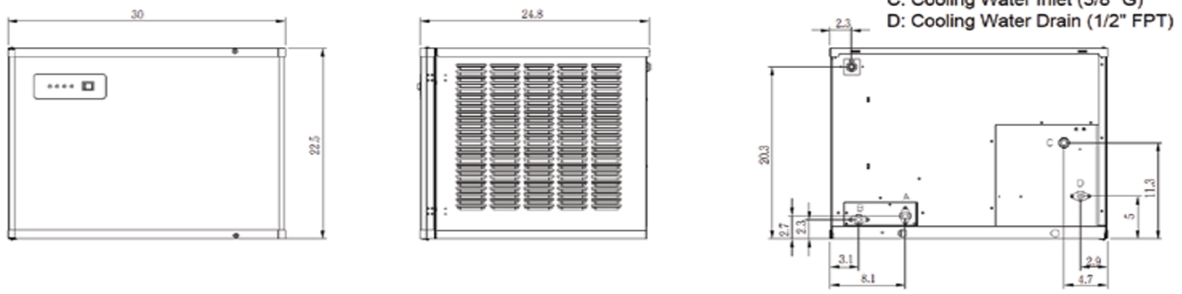

FRONT VIEW

SIDE VIEW

BACK VIEW

Specifications

| Dimensions | Width | Depth | Height | Weight |
|-----------------|-------|-------|--------|------------------------------------|
| IM-0460 Machine | 30" | 24.8" | 22.6" | 162.3 lbs (Net) 192 lbs (Shipping) |

| Model | Ice Shape | Ice Production 24 Hours | | Power Usage kWh/100 lbs. @90°Air/70°F | Potable Water Usage/100 lbs. 45.4 kgs. of Ice |
|--------------|-----------|-------------------------|--------------------|---------------------------------------|-----------------------------------------------|
| | | 70°Air/ 50°F Water | 90°Air/ 70°F Water | | |
| AIR COOLED | cube | 1 ph | 1 ph | 1 Ph | 15 Gal. |
| | | 444 lbs | 376 lbs | 5.43 | 15 Gal. |
| | half-cube | 444 lbs | 376 lbs | 5.43 | 15 Gal. |
| | | 201 kgs | 171 kgs | | 15 Gal. |
| WATER COOLED | cube | 463 lbs | 407 lbs | 4.56 | 15 Gal. |
| | | 210 kgs | 185 kgs | | 15 Gal. |
| | half-cube | 463 lbs | 407 lbs | 4.56 | 14 Gal. |
| | | 210 kgs | 185 kgs | | 15 Gal. |

